

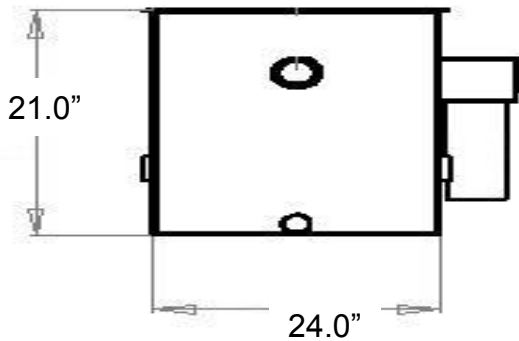


goslyn™ MODEL GOS160 50 GPM Grease Recovery Device

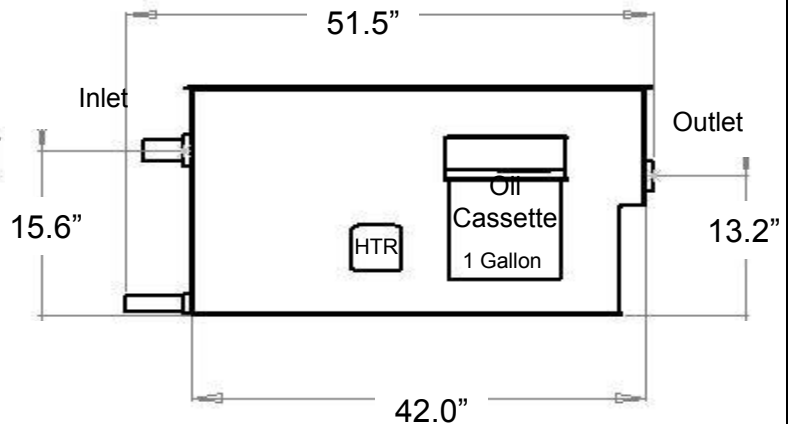

The innovative (patented) goslyn™ is an immiscible liquid separator which operates under hydro static pressure and does not require any moving parts. It continuously and permanently removes Fats, Oils & Greases from waste effluent - keeping your drains free and clear while eliminating the need for costly dousing systems or grease trap pumping. Discharged oil can be recycled along with your used fryer oil!

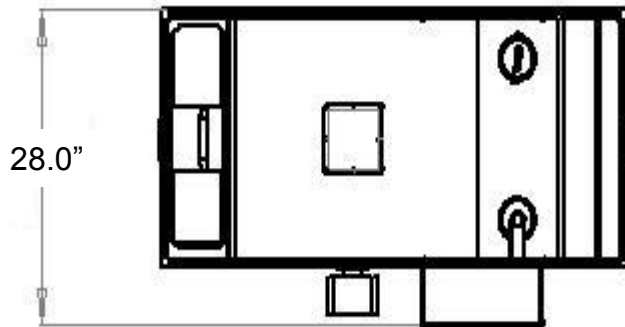

GOS80 Features:

- HEAVY DUTY 2.5 MM 304 SS EXTERIOR CONSTRUCTION
- NEOPRENE SEALS FOR BASE
- IMMERSION HEATER (UL LISTED) TO KEEP EFFLUENT WARM DURING IDLE PERIODS
- SELF-CLOSING DRAIN VALVE INCLUDED
- STRAINER BASKET TO PREVENT SOLID DEBRIS FROM ENTERING DRAIN PIPES
- EASY ACCESS HINGED LID COMPARTMENTS
- CSA B481.1 GREASE INTERCEPTOR CERTIFIED
- MANUFACTURED TO ASME A112.14.3 and ASME A112.14.4


Installation Requirements

Electrical:

110 Volt, 1000 watts, 9 Amps - within 5 feet of Goslyn.

Physical:

- Headroom needed above strainer basket: 12"
- 2" drain pipe to outlet
- Access to front Oil Cassette
- Access to hinged lid for Oil Valve

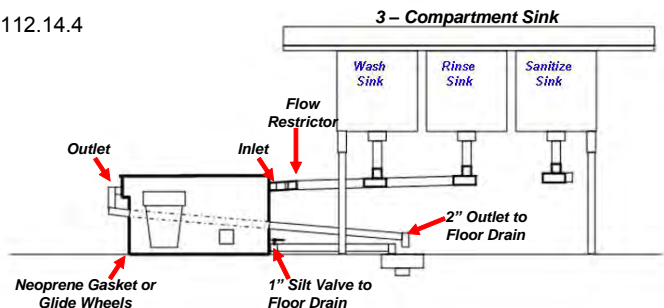

Goslyn LP
1904 University Business Dr.
McKinney TX 75071
214-618-3764
www.goslyn.com

For Sales in Canada
Goslyn Ontario
647 763 4060
gmartin@greasetrap.ca
www.greasetrap.ca

