



Goslyn™ Grease Recovery Device



Goslyn™ is an external grease trap that fits under the sink.

Constructed of stainless steel the Goslyn™ removes Fat, Oil & Grease (FOG) from liquid waste or dishwater. Drains and pipes remain grease free and clear forever.

Grease trap servicing is eliminated with the Goslyn™.

Goslyn™ is the ultimate grease trap replacement.


Typical FOG discharge from sink to drain is reduced from 18,500 parts per million to 62 ppm!! (99.6%)



No Pumping No Chemicals No Odours

Features:

- Heavy Duty 2.5mm 308 Stainless Steel exterior construction
- Neoprene gaskets for lid and base
- Fixed Rate Flow Restrictor
- Immersion Heater (UL Listed) to keep effluent warm during idle periods
- Self-Closing Valve for simple maintenance
- Strainer Basket to keep debris from getting into drain pipes
- Easy access hinged lids for Strainer Basket and Oil Valve
- CSA B481.1 Grease Interceptor Certified
- Designed to ASME A112.14.3 and ASME A112.14.4 Certifications

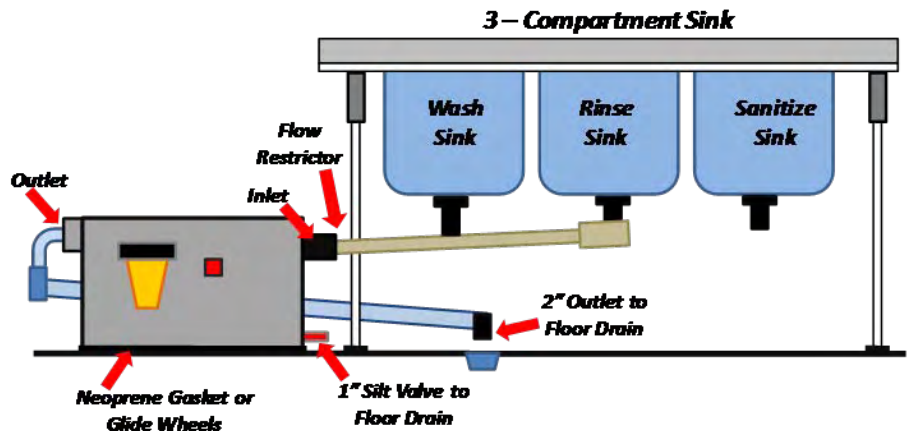

For unit dimensions see page below

Glenn Martin
gmartin@greasetrap.ca
647-763-4060

www.greasetrap.ca

Goslyn™

Grease Recovery Devices

Key Dimensions

Standard Units

Model #	G.P.M.	Height	Length	Width	Height of Inlet (to center)	Height of Outlet (to center)	Electrical
GOS 40	10	16.0"	24.0"	16.0"	12.4"	10.5"	110 Volt, 1000 watts, 9 Amps
GOS 80	25	20.5"	37.0"	16.0"	14.8"	12.4"	110 Volt, 1000 watts, 9 Amps

Low-Profile Units

GOS 60 LP	15	14.0"	36.0"	16.0"	10.0"	6.7"	110 Volt, 1000 watts, 9 Amps
GOS 80 LP	25	14.0"	40.0"	24.0"	10.0"	6.7"	110 Volt, 1000 watts, 9 Amps

Industrial Units

GOS 160	50	21.0"	42.0"	24.0"	15.0"	13.0"	110 Volt, 1000 watts, 9 Amps
GOS 240	75	27.0"	42.0"	24.0"	20.5"	17.5"	110 Volt, 1000 watts, 9 Amps
GOS 320	100	32.0"	42.0"	24.0"	25.5"	22.5"	110 Volt, 1000 watts, 9 Amps

(Note: GOS 240 & GOS 320 have a 3" inlet and outlet)

*McDonalds, Swiss Chalet, Harveys, Milestones, A&W
Kelsey's, Ruth's Chris, Denny's, Leisureworld ...*

Sustainable and Cost Saving